


NOTES:

1. INLET AND OUTLET: 1" MNPT OR BSPT (ISO-R)
2. SUCTION PORT: 1/2" (ID) TUBING BARB OR 1/2" MNPT
3. MATERIAL OF CONSTRUCTION: GLASS REINFORCED POLYPROPYLENE OR PVDF (KYNAR)
4. MAXIMUM TEMPERATURE RATING:
 - POLYPROPYLENE: 150 F. (65.5 C.)
 - PVDF: 200 F. (93.3 C.)
5. MAXIMUM PRESSURE RATING: AT 68 F. (20 C.)
 - POLYPROPYLENE: 150 PSIG (10.3 BAR)
 - PVDF: 200 PSIG (13.8 BAR)



DISCLAIMER: Any recommendations for particular products and/or system design, whether contained in a document, within this drawing, communicated by electronic means, or given verbally, are intended solely as guides to actual system design. Said recommendations are based upon information supplied by others, the accuracy of which is beyond verification by Mazzei Injector Corp. (MIC). Likewise, the actual operation of any system utilizing the products or recommendations of MIC is equally beyond the control of MIC. Therefore, MIC cannot, and does not, warrant the suitability of its products for a particular service nor the performance of any system containing components made or sold by MIC.

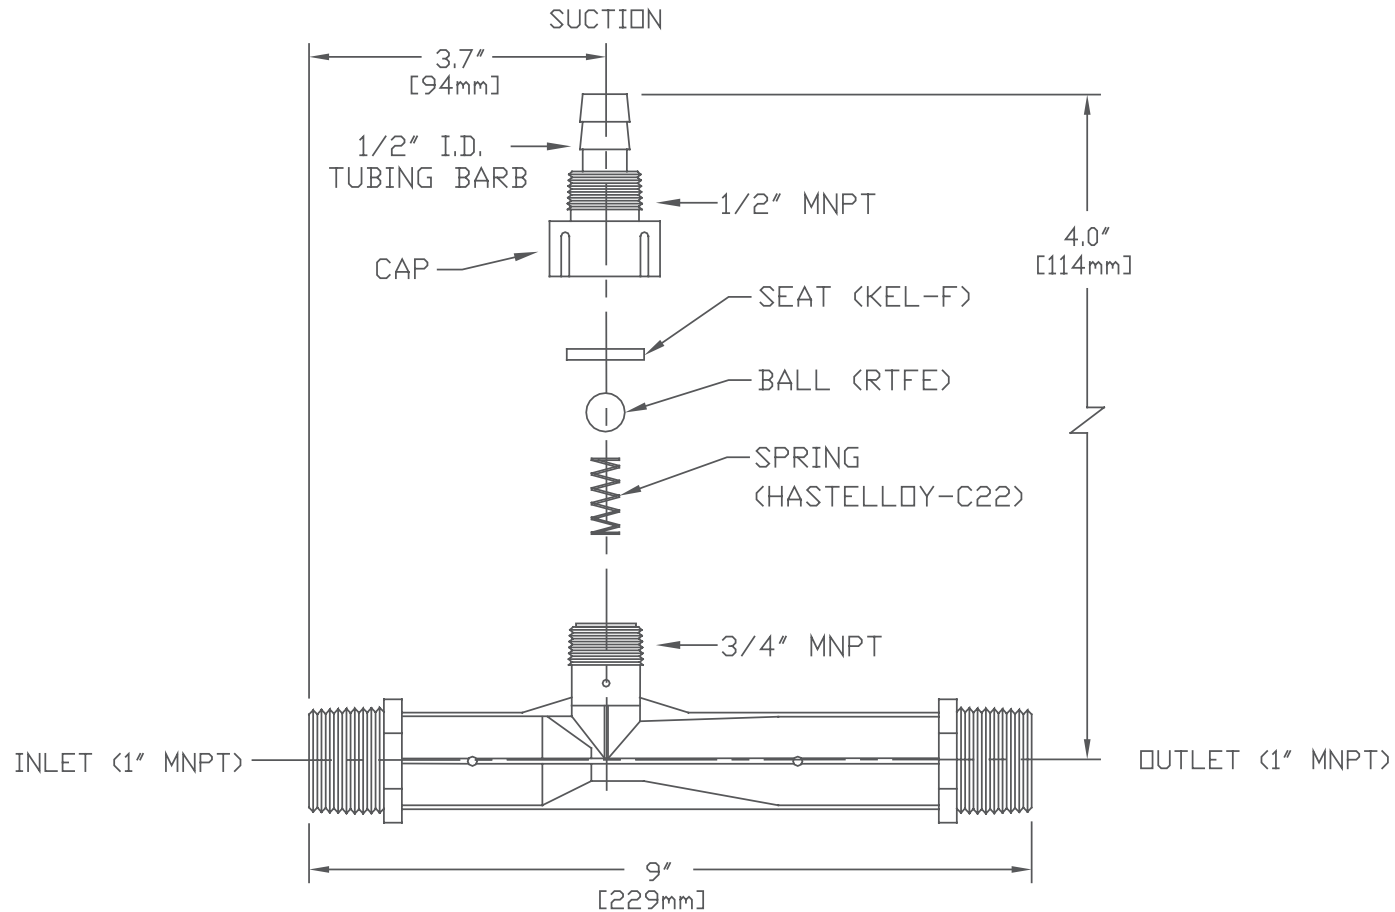

Mazzei Injector Company, LLC
 500 Rooster Drive, Bakersfield, CA 93307
 Tel: 661.363.6500 Fax: 661.363.7500

DATE	2-23-04	TITLE	
DRAWN BY	JRM	MODEL 978-02 INJECTOR	
REVISED			
REVISED BY		NUMBER	JRM-274
SCALE	NONE	MATERIALS:	SEE NOTES
		SIZE	REV.
		PAGE (1) OF (1)	